


## Connecting the Brewsonic

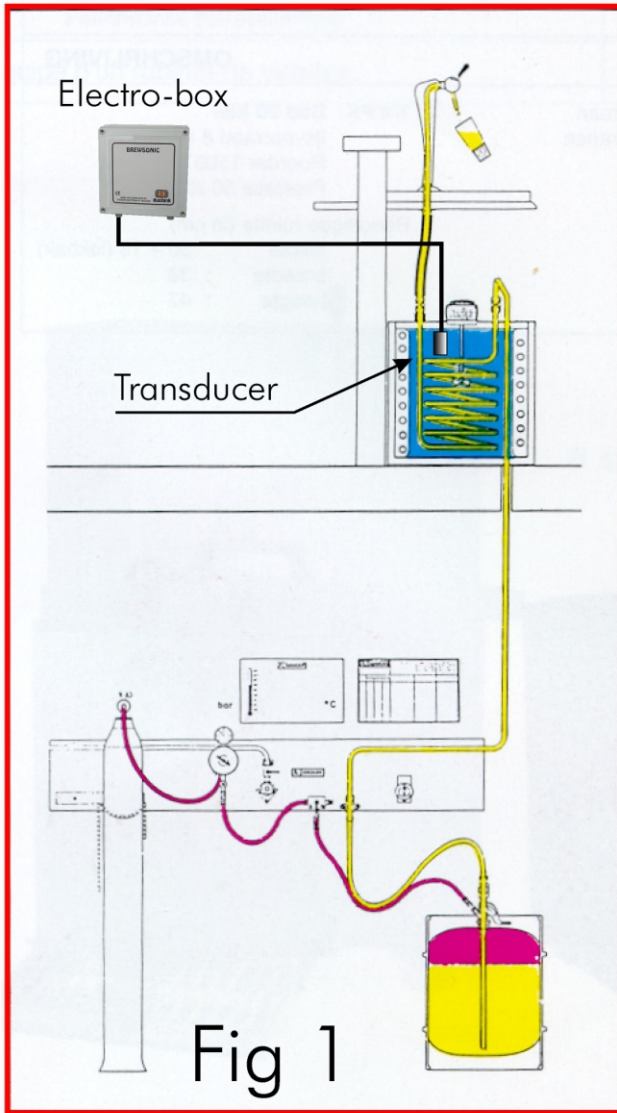

The transducer is immersed in the cooling water of the draught installation in such a way that the top side of the transducer is about 1cm below water level (fig 1).

The Electrobox is mounted near a power socket.

The transducer is connected to the Electrobox simply by plugging the transducer plug into the underside of the Electrobox.

An extension lead is available (Optional).

### How does it work?

The transducer transmits a special ultrasonic signal throughout the installation. This signal prevents the formation of beer stone. In time, the draught installation is kept free from bacteria. It is preferable to fit the Brewsonic to a new installation. If the Brewsonic is fitted to an old draught installation, the system will be completely purified in time, but flakes of old beer stone will begin to come loose and contaminate the beer a couple of days after the installation of the Brewsonic. Therefore, an old installation must be thoroughly cleaned with chlorine prior to installing the Brewsonic.